


# MADA L-BEAD

## Technical Data Sheet

TDS-ACC-R26-Rev2 L-Bead - 2024

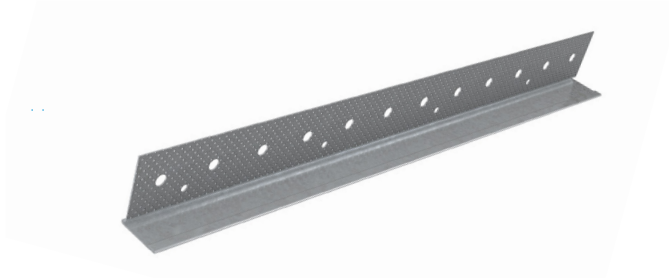

### Product Description

Mada L-Beads have a perforated, recessed edge and are used where the edge of the plasterboard is not exposed and where the fitting of a Stopping Bead would be difficult. Mada L-Bead is fixed to the sheet of plasterboard with an adhesive or staples, with the finishing coats bonding into the plasterboard and feathering up to the bead nib. Mada L-Bead is ideal for door jambs and window returns.

### Field of Application

Applicable in all Drywall Systems, for establishing of exact and vertically oriented edges.

### Manufacturing Standards

In compliance with ASTM C1047.

### Product Characteristics

Parameters	Details
Material	Galvanized Steel
Coating	Z120
Yield Strength	240MPa - 310MPa
Tensile Strength	340MPa - 420MPa
Thickness	0.40mm and 0.50mm
Length	3000mm
Plasterboard Type	12.5mm, 15mm and 16mm
Standard Size (mm)	30

### Handling and Storage

- Products are supplied in pack and sub-pack quantities and should be handled in accordance with the recommendations contained in Health and Safety at Work Principles and Practice..
- Metal products should be stored in an environmentally-friendly area away from airborne contaminants such as acid and salt sprays.
- People with sensitive skin conditions should seek medical advice before prolonged handling of metal products; hands should be washed before eating and for personal hygiene.
- Non-fogging goggles should be worn when cutting metal sections.

### Installation Guidelines

- Hold bead firmly against corner and nail bead through small holes every on each flange.
- Make sure that staples penetrate the plasterboard.
- The height of staples should not be more than the thickness of plasterboard.
- They can also be fixed with Adhesive or screwed to pass thru the framing at 300mm centers.
- Drive all nails below nose of corner bead and tightly into flange.
- Joint compound should be covered smoothly and evenly.
- The products should not be used for purposes other than those shown on the Mada Technical Proposal.